

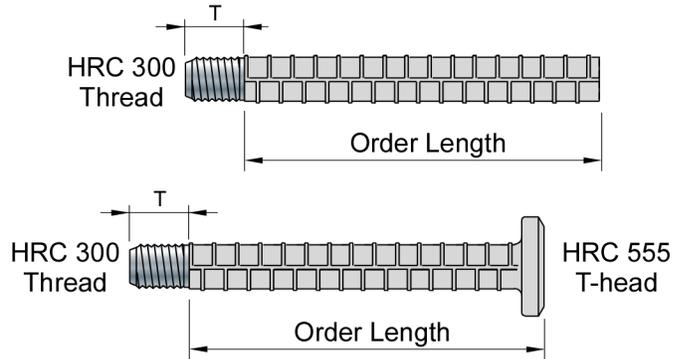
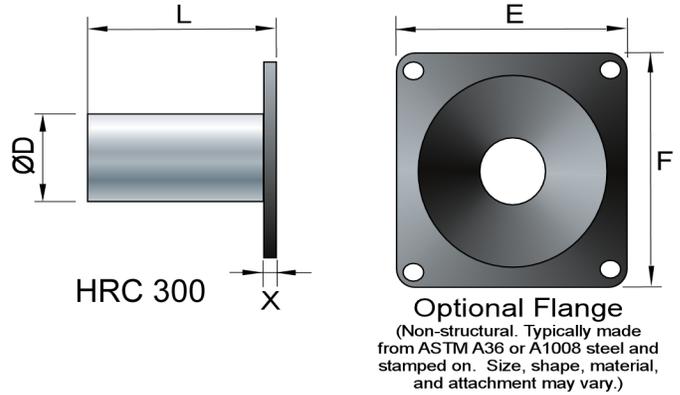


HRC 300 Series Form Protector

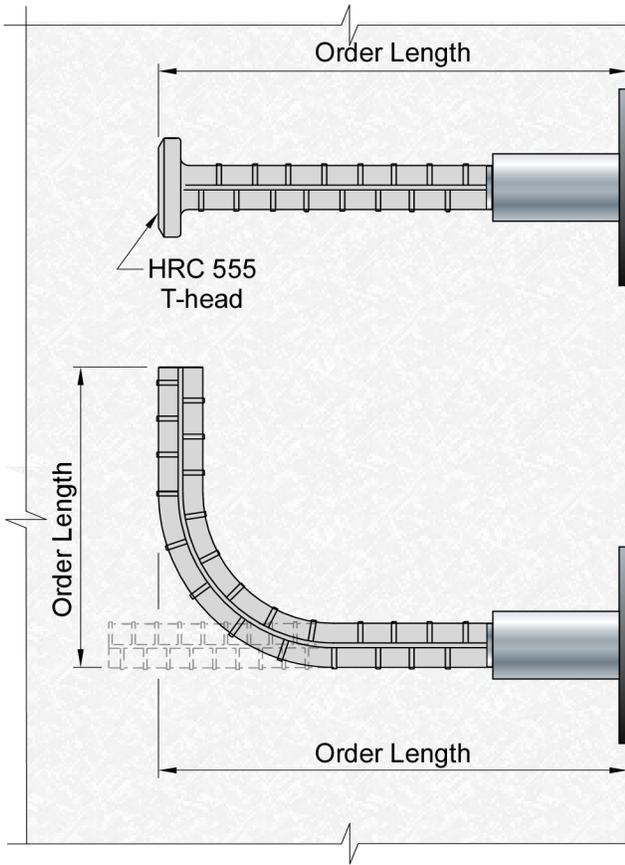

Product Variations

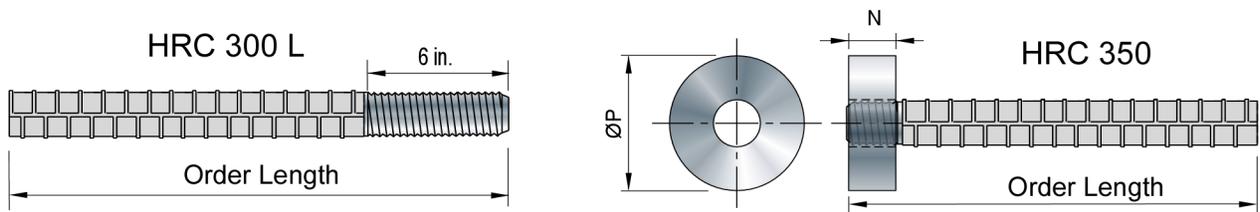

HRC 300 Series Form Protector Mechanical Couplers develop the minimum tensile strength of the rebar spliced (A706/A615). Hand tighten to snug fit. Lubricate threads and use pipe wrench if necessary.

Rebar Properties			Thread/ Coupler Dimensions						Flange Dimensions	
Bar Size	Diameter (inch)	Area (in ²)	Thread Information		Length L (inch)	Diameter D (inch)	HRC 350		Thickness X (inch)	E x F (inch x inch)
			Thread Size (UNC)	T (inch)			ØP min (inch)	N (inch)		
#4	0.500	0.20	1/2" - 13 UNC	0.75	1.75	0.88	1.13	0.75	0.06	2 x 2
#5	0.625	0.31	5/8" - 11 UNC	0.75	2.00	1.00	1.5	0.75	0.06	2 x 2
#6	0.750	0.44	3/4" - 10 UNC	1.00	2.13	1.13	1.75	1.00	0.06	2 x 2
#7	0.875	0.60	7/8" - 9 UNC	1.00	2.50	1.25	2.00	1.00	0.06	2 x 2
#8	1.000	0.79	1" - 8 UNC	1.13	3.00	1.50	2.25	1.13	0.04	2.18 x 2.75

All data subject to change without notice.

Rev. 21-0607



HEADED REINFORCEMENT CORP.

11200 Condor Avenue • Fountain Valley, CA. 92708, USA

Tel: 714-557-1455 • FAX: 714-557-4460 • www.HRC-USA.com