




HRC 300 Series Form Protector Coupler

Canadian Rebar Size (CSA G30.18) Compatibility

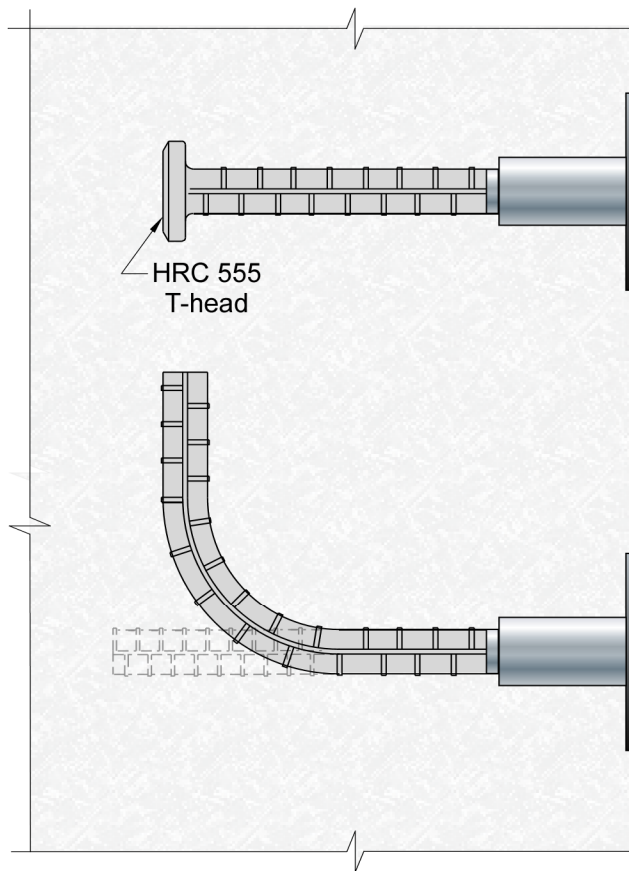


HRC 300

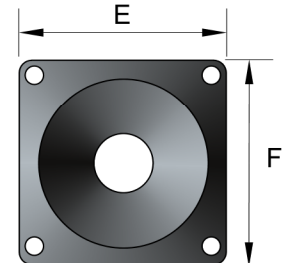


Optional Flange

*(Non-structural. Typically made from ASTM A36, A1008 steel or plastic. Size, shape, material, and attachment may vary.)

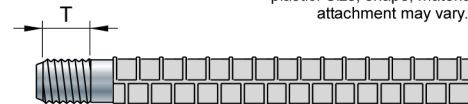


HRC 300 Thread

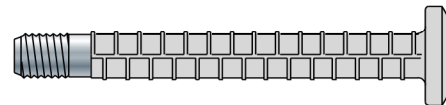

HRC 555 T-head

Product Variations

HRC 300 L



Dimensions of HRC 300 Series Form Protector

Bar Size	Thread/Coupler Dimensions				Flange Dimensions	
	Thread Information		Length L (mm)	Diameter D (mm)	Thickness X (mm)	E x F (mm x mm)
	Thread Size (UNC)	T (mm)				
15M / #5	5/8"-11 UNC	19.1	50.8	25.4	1.5	50.8 x 50.8
20M / #6	3/4"-10 UNC	25.4	54.1	28.7	1.5	50.8 x 50.8
25M / #8	1" -8 UNC	28.6	76.2	38.1	1.0	55.4 x 69.9

Contact HRC for information on availability for Canadian bar sizes 30M and larger.

All data subject to change without notice.

Rev. 25-1205



Headed Reinforcement Corp.
11200 Condor Ave. Fountain Valley, CA 92708
714-557-1455 714-557-4460 fax
www.hrc-usa.com