


HRC 500 Series XTENDER Position Couplers

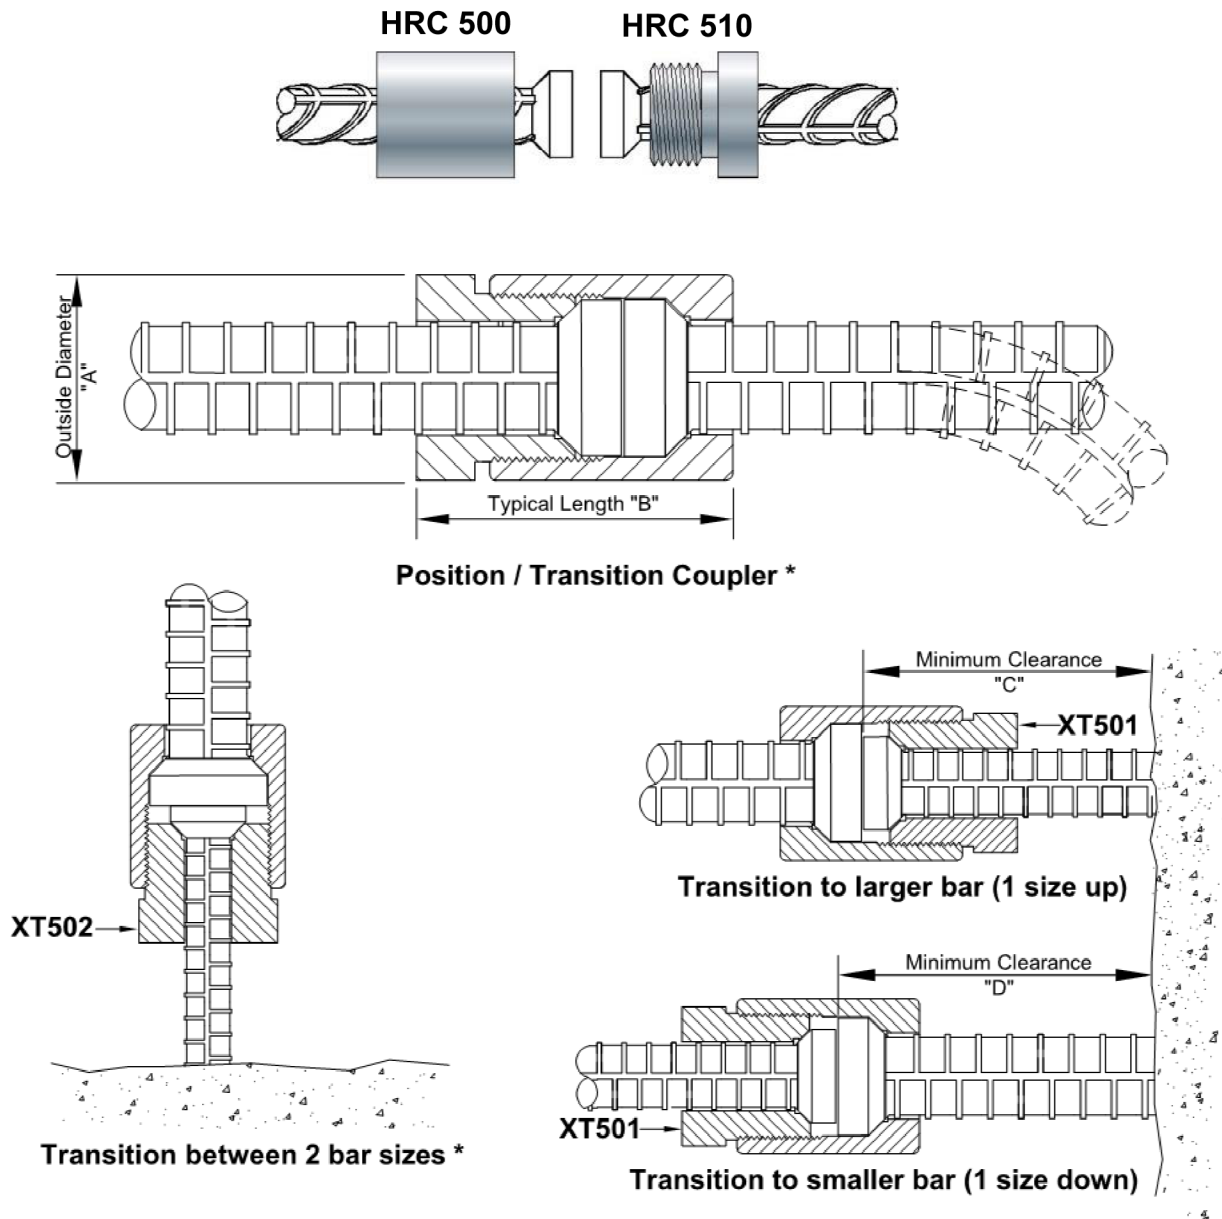

**Transition Male Couplers up to five (5) sizes down are also available*

Dimensions of HRC 500 Series Couplers

Bar size	#4	#5	#6	#7	#8	#9	#10	#11	#14
A - Coupler OD [in]	1.375	1.500	1.625	1.875	2.125	2.375	2.625	2.875	3.500
B - Typical Length [in]	2.000	2.130	2.380	2.880	3.130	3.500	3.750	4.250	5.130
C - Male Clearance [in]	5.25	5.25	5.25	5.75	6.25	8.00	8.25	8.50	10.00
D - F/M Clearance [in]	6.00	6.25	6.375	7.125	7.875	9.75	10.375	10.75	12.875

All data subject to change without notice.

Rev. 25-1205



Headed Reinforcement Corp.
 11200 Condor Ave. Fountain Valley, CA 92708
 714-557-1455 714-557-4460 fax
www.hrc-usa.com