



# XTENDER 520 Form Protector, Position and Transition Coupler

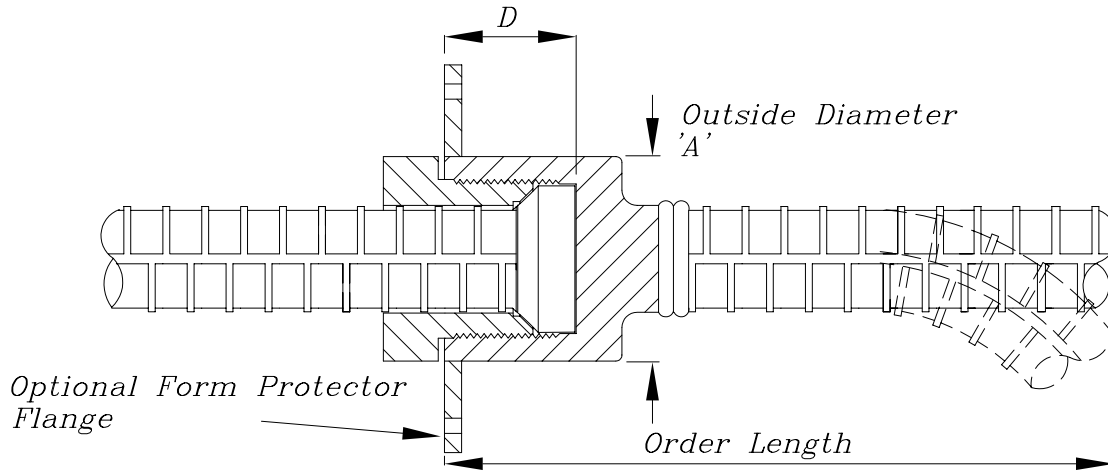


HRC 501  
Transition Nut




One bar size down

HRC 520 / 120 (Headed)

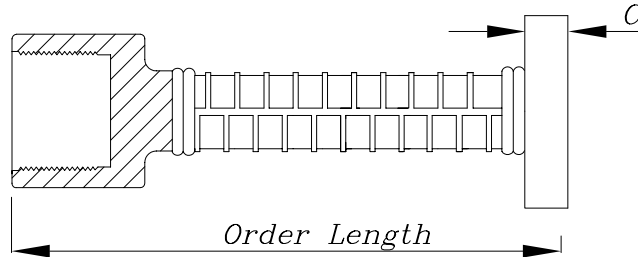


Order Length

HRC 502  
Transition Nut



Two bar sizes down

HRC 520 / 520 Combination

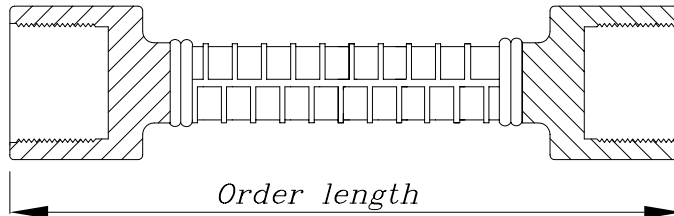

Order length

:R/Drawings 01/HRC Standards/XTENDER 520

520F	#4	#13	#5	#16	#6	#19	#7	#22	#8	#25	#9	#29	#10	#32	#11	#36	#14	#43
Dimensions	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
A. Coupler OD	1 1/8	30	1 1/2	40	1 1/2	40	1 7/8	48	2 1/8	54	2 3/8	60	2 5/8	67	3	76	3 1/2	89
B. T-Head length	ø1.75	ø44	2	51	2 1/4	57	2 1/2	64	3	76	3 1/4	83	3 1/2	89	4	102	5	127
C. T-Head depth	1/2	13	1/2	13	5/8	16	5/8	16	3/4	19	3/4	19	1	25	1	25	1 1/4	32
D. Cavity depth	0.71	18	0.91	23	1.06	27	1.22	31	1.38	35	1.46	37	1.57	40	1.61	41	1.89	48

12/Oct/2007

All data subject to change without notice.



**HEADED REINFORCEMENT CORP.**  
11200 Condor Avenue • Fountain Valley, CA 92708  
Tel: (714) 557-1455 • Fax: (714) 557-4460