



HRC 551 Series Anchor Head




Substitute Standard Hooks

For structural, practical or economical reasons, the **HRC 551 Series Anchor Head** is your problem solver. The use of **Headed Reinforcement** provides simplified rebar details, reduced congestion, and improved field installation when compared to standard hooks for large diameter reinforcing bars. Available in 4Ab and 9Ab head sizes for A615/A706 Grade 60 and Grade 80 #14 and #18 bars. Contact HRC for information on other bar size/grade & bearing area combinations.

Simple Installation

HRC 551 Series T-head is a 2-piece end anchor that attaches to bars with an upset head. The plate and cap screw together, around the upset head without the need to rotate the bars.

Dimensions of HRC 551 Series Anchor Heads

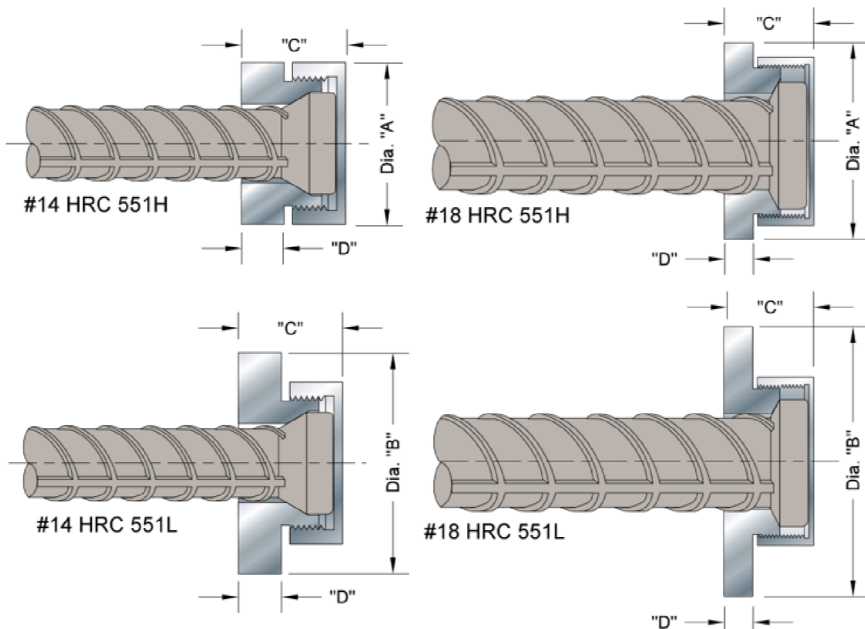

Dimensions (inch)	#14/45M	#18/55M
A. HRC 551H (4Ab) O.D.	4.00	5.25
B. HRC 551L (9Ab) O.D.	5.50	7.25
C. Assembled Thickness (typ)	2.125*	2.17*
D. Thickness (min)	0.98	0.79

* Tolerance +/- 0.16" (4mm)

Hand-tighten to a snug fit.



Headed Reinforcement Corp.
11200 Condor Ave. Fountain Valley, CA 92708

Rev. 26-0605

Development and Anchorage of #14 and #18 Reinforcing Bars



Meets ASTM A970 Class HA and Class A Requirements

Approvals:

IAPMO UES ER-177
IAPMO UES UEL-5052

City of Los Angeles Building Code (LABC) Compliant

ACI 318 Compliant

CSA A23.3 & S6 Compliant (5Ab & 10Ab)

For installation parameters and current approval please visit www.hrc-usa.com or contact an HRC representative.

HRC Performance
Local Quality Fabrication

sales@hrc-usa.com
(714) 557-1455
www.hrc-usa.com



Made in the USA

